

DOUBLE GATE KNIFE GATE VALVE



The DT model knife gate valve is a bi-directional valve widely used in the Pulp and Paper industry (paper recycling) and especially designed to handle high concentrated or contaminated media. In the open position, both gates are retracted into the body, assuring full flow. When the gates close, they push stock and contaminants as staples, wires, etc., out of the body and back into the flow. As a result of this double gate design, the stroke time of these valves is half of that of the conventional valves. All components subject to wear can be easily replaced

Product description

- Bi-directional wafer type double gate knife gate valve
- Size range of DN100-600 (larger sizes upon request). See Dimension Charts for pressure rating
- Standard flange connection: EN 1092 PN10 and ASME B16.5 (class 150). Others upon request
- Double acting pneumatic actuation
- For EU Directives and other Certificates, please see the document: Directives and Certificates Compliance - Knife Gate Valves - Catalogues and Datasheets

Features

- Internally machined fabricated two-part bolted body with HMWPE liners for optimum gate guiding and sliding when traveling
- Full port design for grater flow capacity and minimal pressure drop
- Dual stainless steel gate, polished both sides to avoid jamming and seat damage
- Two cast stainless steel seat rings, easily replaceable, that protect the body
- Double packing with easy access and adjustable packing glands ensuring a tight seal. Long life PTFE impregnated synthetic fiber plus EPDM O-ring. Wide range of packing materials available
- RAL-5015 blue epoxy-coating on all cast iron/carbon steel components
- Automated valves provided with gate guards in accordance with EU Safety Standards
- Other options: special materials, fabricated valves, etc.
- Actuation accessories: limit & proximity switches, mechanical stops, positioners, solenoid valves, manual overrides, locking devices and fail safe systems

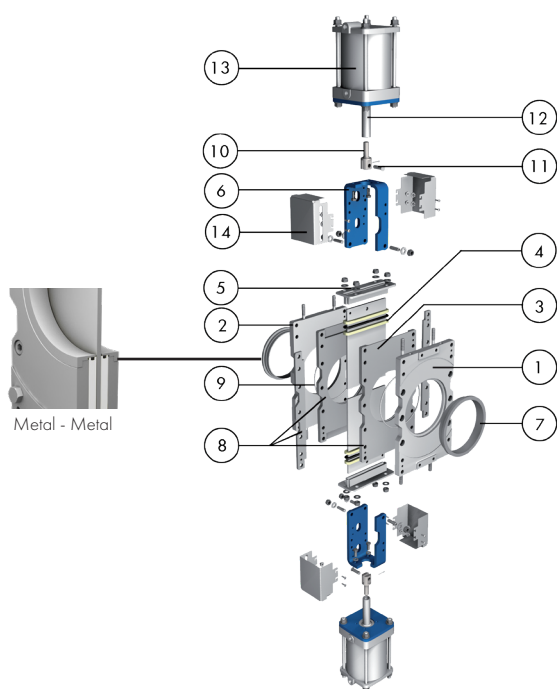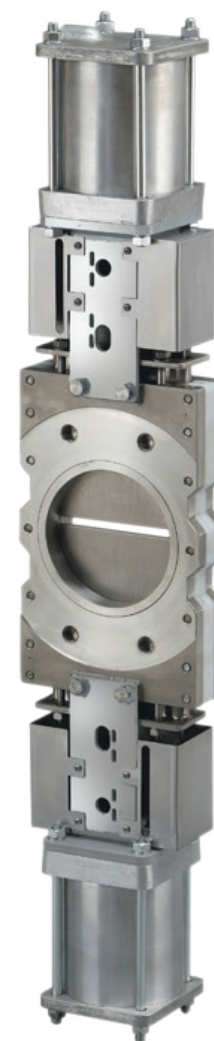

STANDARD PARTS LIST

Part	Description
1 Body	Carbon steel / AISI 316 ¹
2 Counterbody	Carbon steel / AISI 316 ¹
3 Gate	AISI 304 / AISI 316 ¹
4 Packing	PTFE Impreg. Synth. Fibre (both with an EPDM o-ring)
5 Gland follower	Carbon steel / AISI 316 ¹
6 Yoke	Carbon Steel-Epoxy Coated
7 Seat rings	CF8M
8 Body liner	HMW Polyethylene
9 O-ring	Nitrile
10 Clevis	17-4 PH
11 Pin	AISI 304
12 Piston rod	AISI 304
13 Cylinder	Aluminium
14 Gate guards	AISI 304

¹ Stainless steel configuration

Double Acting Pneumatic Cylinder

DN	Pressures	A	B	H	Weight (Kg)	Connect.
100	10 bar	50	115	882	48	1/4"G
125	10 bar	50	140	934	56	1/4"G
150	10 bar	60	140	1070	67	1/4"G
200	10 bar	60	175	1310	80	1/4"G
250	10 bar	70	220	1562	90	3/8"G
300	6 bar	70	220	1732	160	3/8"G
350	6 bar	96	277	1980	255	3/8"G
400	6 bar	100	277	2140	340	3/8"G
450	5 bar	106	382	2370	405	1/2"G
500	4 bar	114	382	2630	490	1/2"G
600	4 bar	114	382	2930	580	1/2"G

